

OPERATING YOUR IC BUS



USING ABB CHARGER - START A CHARGING SESSION

This procedure was developed using the ABB 24kW charger from InCharge.

The vehicle cannot be driven when a charge plug is connected to the charge port.

Please contact your local IC dealer if you experience any charging issues.

If steps are not followed in order, charging errors may occur.

NOTE: Only use the emergency release cord in emergencies. Do not pull emergency release cord to stop a normal charging event.



1

Park vehicle within reach of charge port.

Ensure vehicle is in **Neutral (N)** and parking brake is set.



2

With **key in the OFF position**, wait **90 seconds**.

Next, insert charging handle into the vehicle charge port.



3


The charge interface button will then illuminate **BLUE** to indicate the charger to vehicle connection is secure.



4

Wait for the charge interface button to turn **AMBER**.

Emergency **release cord** will also retract.

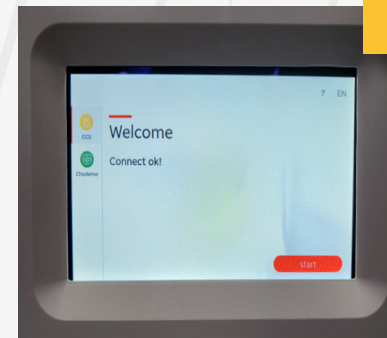

5

Click **READY/START button** on the charger screen to start charging process.



6

Blinking **GREEN** indicates charging is in progress.

Solid **GREEN** indicates charging complete.

ELECTRIC

