



OPERATING YOUR IC BUS

ELECTRIC

USING INCHARGE ICE CHARGERS - SEQUENTIAL CHARGING

This procedure was developed using the ICE chargers from InCharge.

NOTE: ICE-30 chargers can come with one or two charge plugs. The ICE-30 charger can only charge one vehicle at a time.

With sequential charging enabled, two vehicles can be connected and once the first vehicle has finished charging, the second will automatically start.

NOTE: Only use the emergency release cord in emergencies. Do not pull emergency release cord to stop a normal charging event.



1


With **key in the OFF position**, wait **90 seconds**.

Next, insert charging handle into vehicle #1 charge port.



2

The charge interface button will then illuminate **BLUE** and then **AMBER**.

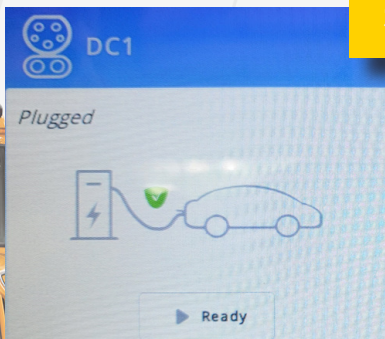

3

Initiate charge event by **clicking the READY button** on the charger screen for the respective charge gun.


Wait **30 seconds**.



4

With **key in the OFF position on vehicle #2**, wait 90 seconds.

Insert charging handle into the **vehicle #2** charge port.

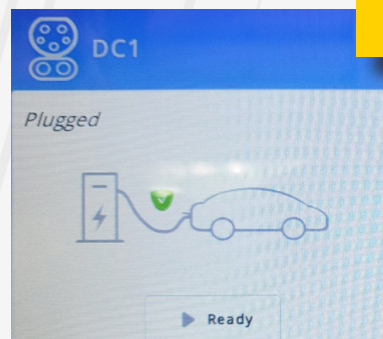

5

Click READY button on the charger screen to start charging process for **vehicle #2**.



6

The charger will display **"Please Wait..."** message on screen for vehicle #2.

This is normal operation until vehicle #1 reaches its full charge.

